Your Peace of Mind is Our Top Priority®

Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies.

ZOELLER® PUMP COMPANY

Zoeller Family of Water Solutions™

SECTION: 2.65.070
FM2803
0814
Supersedes
0114

TECHNICAL DATA SHEET
proPak SERIES

Preassembled Sump Pump System with Battery Backup

PRODUCT SPECIFICATIONS

AC PUMP

- Model 49 (see FM2777), 53 (see FM2778) or 98 (see FM2779) included

DC PUMP

- 12V DC pump supplied with 6' (1.8 m) leads
- Battery life under continuous-run conditions: 7-1/2 hrs.*
- Internal check valve in the discharge

DC CHARGER

- Battery burnout and overcharge protection
- Solid state automatic controllers with alarms, light indicators and warning systems
- 10 amp battery charger

LED LIGHT INDICATORS

- AC power on
- Battery charging
- Battery charged
- Low battery
- Alarm off
- High water

FLOAT

- Low-voltage vertical master switch

BATTERY CASE

- Polyethylene battery case
- Will accomodate maximum battery dimensions of 13" L x 7-1/2" W x 9-1/2" H (33 L x 19 W x 24 H cm)
- Accomodates all group size 27 batteries

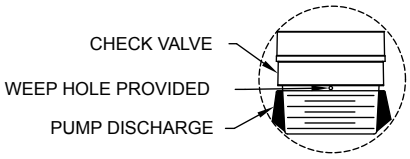

DETAIL "A"
(SCALE: 4X)

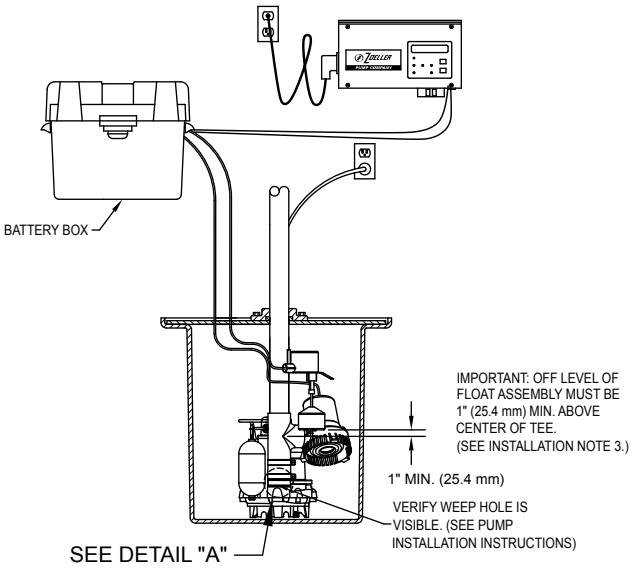

NOTE: Basin and battery not included

SK2750

© Copyright 2014 Zoeller® Co. All rights reserved.
502-778-2731 | 800-928-7867 | 3649 Cane Run Road | Louisville, KY 40211-1961 | www.zoeller.com

TOTAL DYNAMIC HEAD FLOW PER MINUTE

DC PUMPS

MODEL		507	
Feet	Meters	Gal.	Liters
5	1.5	23.0	87.1
10	3.0	15.0	56.8
15	4.6	5.0	18.9
Shut-off Head:		17.5 ft.(5.3m)	

009932

NOTE: Above performance chart based upon actual performance achieved with a 12 Volt deep-cycle battery. Some manufacturers publish performance data based upon D.C. Pump testing according to Marine Industry standards which can reflect a performance of 40% - 80% higher than actual battery powered performance.

See FM2777 (model 49), FM2778 (model 53) or FM2779 (model 98) for complete pump specifications.

	49	53	98
507-0009	X		
507-0008		X	
507-0011			X
508-0006		X	
508-0007			X

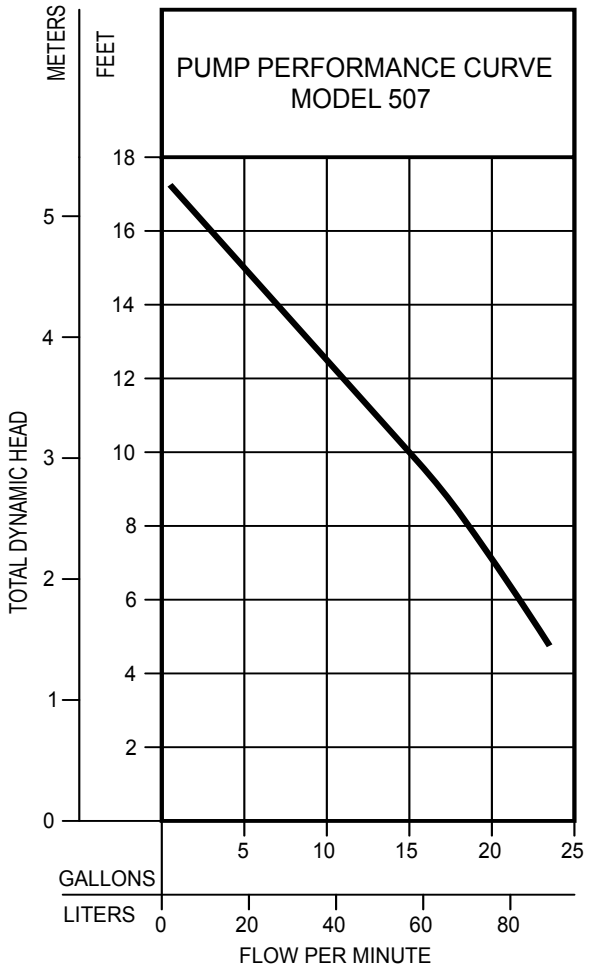

AC PUMPS

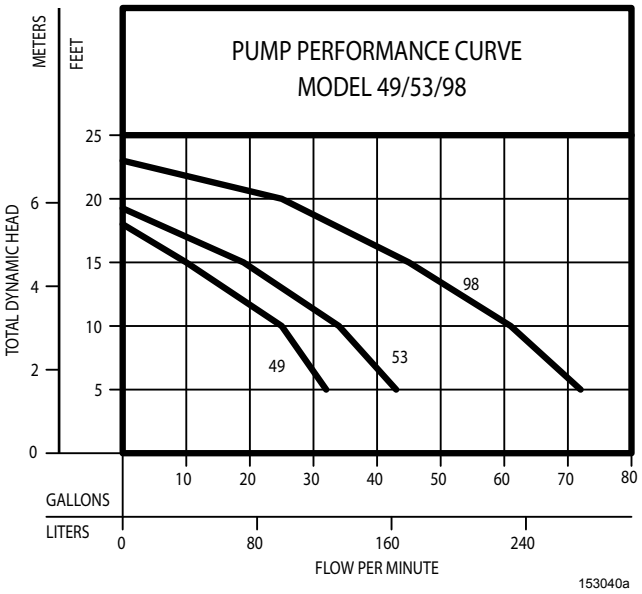

153040a

TOTAL DYNAMIC HEAD/FLOW
PER MINUTE
EFFLUENT AND DEWATERING

MODEL		49		53		98	
Feet	Meters	Gal.	Liters	Gal.	Liters	Gal.	Liters
5	1.5	32	121	43	163	72	273
10	3.0	25	95	34	129	61	231
15	4.6	10	38	19	72	45	170
20	7.1	--	--	--	--	25	95
Shut-off Head:		18 ft.(5.5m)		19.25 ft.(5.9m)		23 ft.(7.0m)	

153040b

⚠ CAUTION All installation of controls, protection devices and wiring should be done by a qualified licensed electrician. All electrical and safety codes should be followed including the most recent National Electrical Code (NEC) and the Occupational Safety and Health Act (OSHA).

© Copyright 2014 Zoeller® Co. All rights reserved.
502-778-2731 | 800-928-7867 | 3649 Cane Run Road | Louisville, KY 40211-1961 | www.zoeller.com